

# Water Circulation Pump

## WEV-140505E



▶ **3 Phase Brushless Motor/ Centrifugal Pump / for Cooling and Heating system**

### Features



✓ Soft Start    ✓ Single Speed / Variable Speed    ✓ Water Proof Level: IP 68

Model #	WEV-140505E
Voltage	12 V
Voltage Range	5-14 V
Current	1.3 A
Max. Power	15.6 W
Flow Rate	480 LPH
Pressure	5 M
Inlet Diameter	11.0 mm
Outlet Diameter	11.0 mm
Water Temperature	- 30 ~ 105 °C
Ambient Temperature	- 30 ~ 85 °C
Storage Temperature	- 30 ~ 85 °C
Dimensions	93.0 x 64.2 x 52.0 mm (pump only) 66 x 45 x 19 (controller)
Weight	242 g
Pump Body Material	PA66 + 30% GF
Noise Level	< 40 dB
Single / Variable Speed	Single Speed / Variable Speed (PWM)
Controller	External

YT STABLE Tech. Corp.

#92, Ln. 646, Sec. 3, Jinma Rd., Changhua City, Changhua County 50097, Taiwan (R.O.C)  
T: +886-4-7611589, +886-4-7629732 / F: +886-4-7629732 / E: [sales@yutai.tw](mailto:sales@yutai.tw) / W: [www.yutai.tw](http://www.yutai.tw)

# Water Circulation Pump WEV-140505E

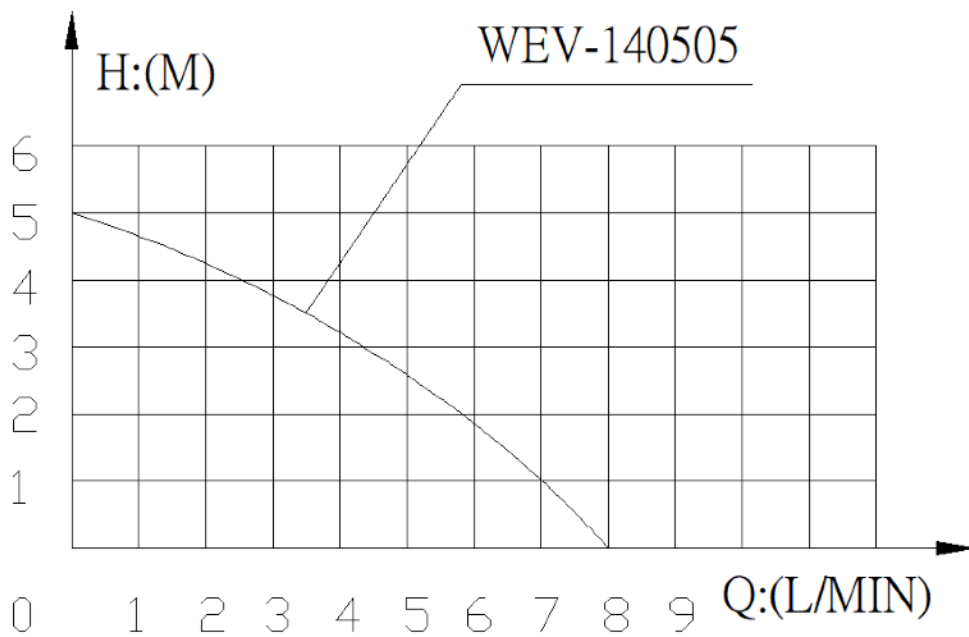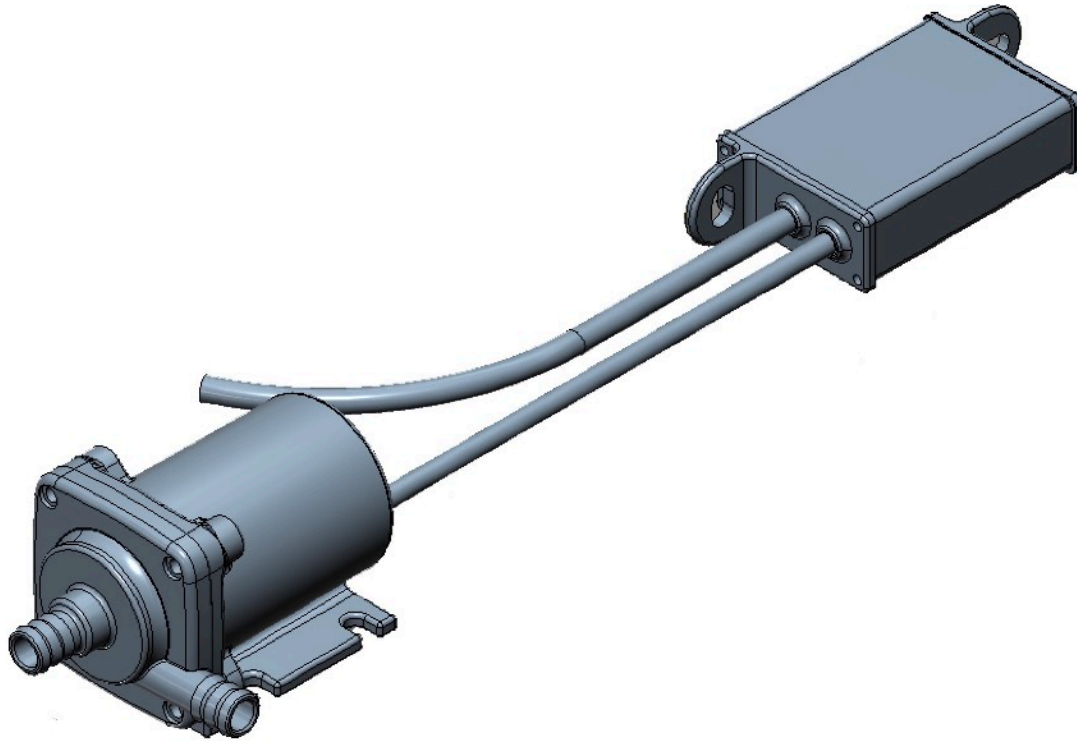

YT STABLE Tech. Corp.

#92, Ln. 646, Sec. 3, Jinma Rd., Changhua City, Changhua County 50097, Taiwan (R.O.C)  
T: +886-4-7611589, +886-4-7629732 / F: +886-4-7629732 / E: [sales@yutai.tw](mailto:sales@yutai.tw) / W: [www.yutai.tw](http://www.yutai.tw)