

# Water Circulation Pump

## WEV 5 Series for EV



▶ **3-phase Brushless Motor/ Centrifugal Pump / for Cooling and Heating system**

### Features



- ✓ Soft Start
- ✓ Single Speed / Variable Speed
- ✓ Water Proof Level: IP 68

Model #	WEV-152508	WEV-252508	WEV-153007	WEV-253507
Voltage	12 VDC	24 VDC	12 VDC	24 VDC
Voltage Range	9.5VDC~16VDC	11VDC~28VDC	9.5VDC~16VDC	11VDC~28VDC
Current	5.6 A ± 10%	4.5 A ± 10%	5.6 A ± 10%	4.5 A ± 10%
Max. Power	67.2 W	108 W	67.2 W	108 W
Flow Rate	2500 LPH		2800 LPH	3500 LPH
Pressure	8 M		7 M	
Inlet Diameter	22 mm		27 mm	
Outlet Diameter	22 mm		27 mm	
Water Temperature	-10 ~ 105 °C			
Ambient Temperature	- 10 ~ 85 °C			
Storage Temperature	- 10 ~ 85 °C			
Dimensions	122.0 x 94.0 x 96.3 mm		124.0 x 94.0 x 96.2 mm	
Pump Body Material	PA66 + 30% GF / Aluminum			
Noise Level	< 40 dB			
Single / Variable Speed	Single Speed / Variable Speed (PWM)			
Controller	Built-in			
Weight	about 800g			

YT STABLE Tech. Corp.

#92, Ln. 646, Sec. 3, Jinma Rd., Changhua City, Changhua County 50097, Taiwan (R.O.C)  
 T: +886-4-7611589, +886-4-7629732 / F: +886-4-7629732 / E: [sales@yutai.tw](mailto:sales@yutai.tw) / W: [www.yutai.tw](http://www.yutai.tw)

# Water Circulation Pump WEV 5 Series for EV (22mm)

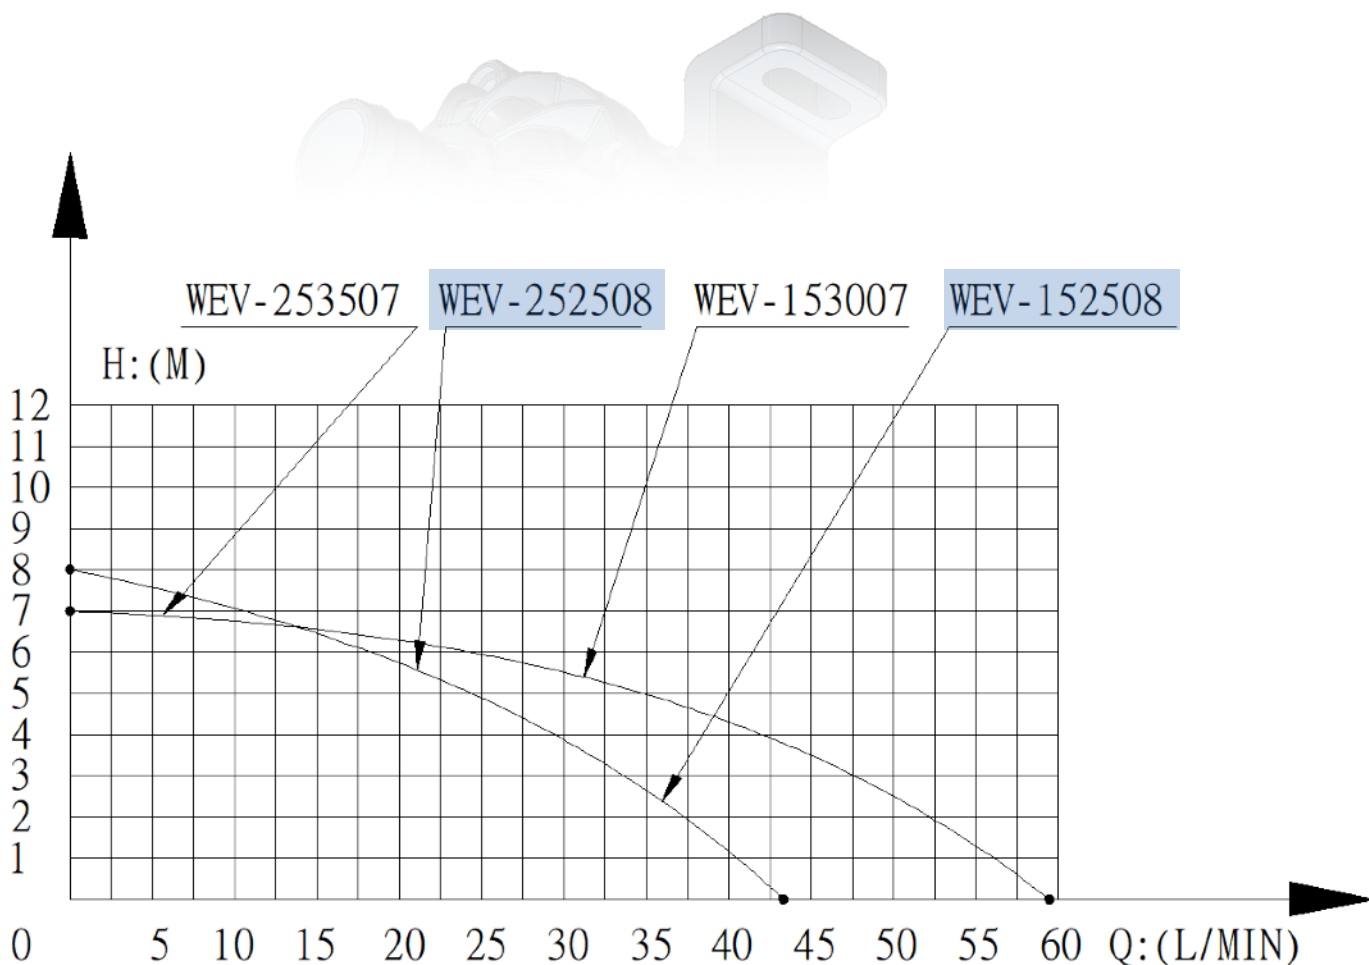
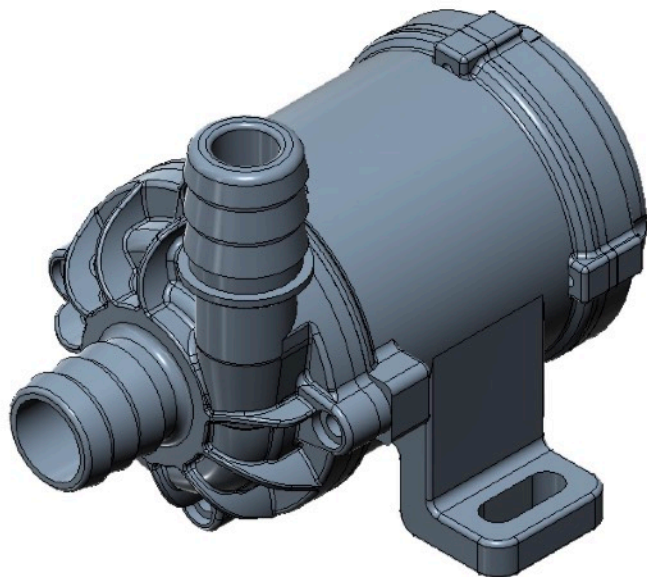


YT STABLE Tech. Corp.

#92, Ln. 646, Sec. 3, Jinma Rd., Changhua City, Changhua County 50097, Taiwan (R.O.C)

T: +886-4-7611589, +886-4-7629732 / F: +886-4-7629732 / E: [sales@yutai.tw](mailto:sales@yutai.tw) / W: [www.yutai.tw](http://www.yutai.tw)

# Water Circulation Pump WEV 5 Series (27mm)

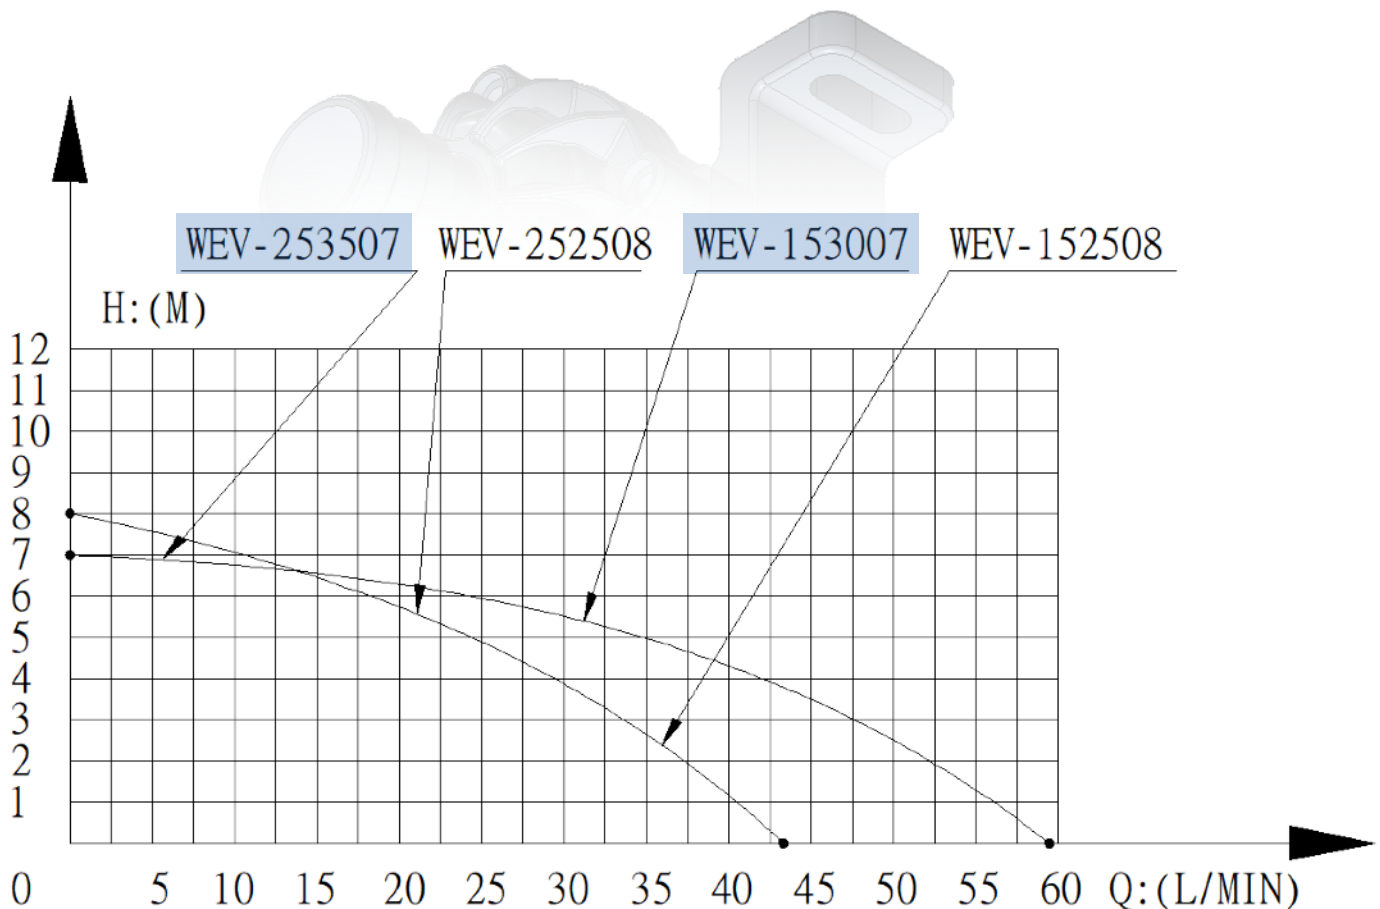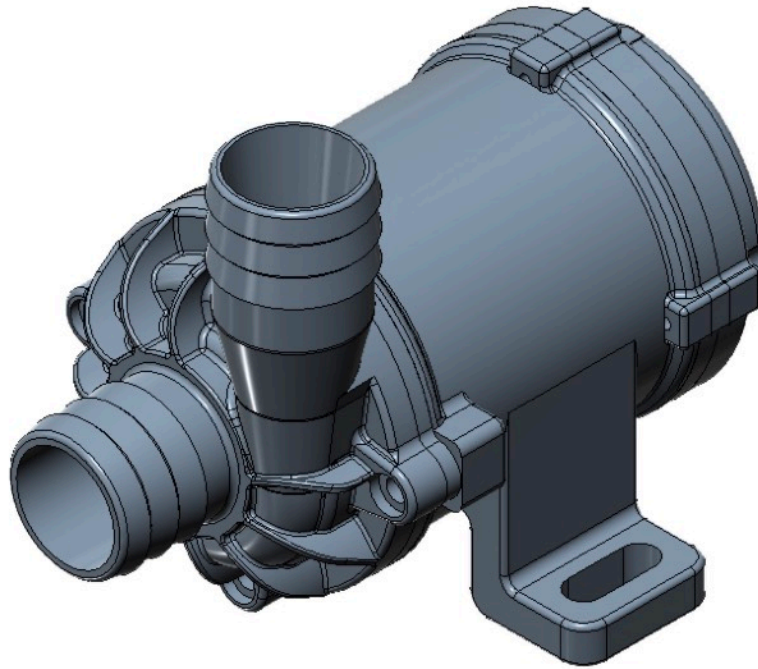

YT STABLE Tech. Corp.

#92, Ln. 646, Sec. 3, Jinma Rd., Changhua City, Changhua County 50097, Taiwan (R.O.C)

T: +886-4-7611589, +886-4-7629732 / F: +886-4-7629732 / E: [sales@yutai.tw](mailto:sales@yutai.tw) / W: [www.yutai.tw](http://www.yutai.tw)